AWNINGS
Catalogue

DECO-B

EX STOCK ACRYLIC FABRIC


Arena Flame


Tostado Heather


Roca Moonrock


Cadet Grey


Flame Vision


Charcoal Gray


Marine Blue

Other custom colours available.

FABRIC TECHNICAL SHEET

FABRIC CHARACTERISTICS		
Composition	100% Solution dyed acrylic	
Type of textile	Reversible Acrylic	
Finish	Special infinity treatment for awning applications, Anti-stain, rot-proof water repellent and breatheable	BS 7209
Use	Outdoor	
TECHNICAL FEATURES		
Weight	300 g/m^2 ±5%	UNE-EN 12127
Thickness	0,55 mm	UNE-EN ISO 5084
Width	120 cm ± 1% (Standard)	
	220 / 250 / 300 cm ±1% (Optionally)	
Standard Roll Length	60 m	
Water Column	≥ 300 mm	UNE-EN ISO 20811
Tensile Strength (Warp / Weft)	130/78 daN/5 cm ±5%	UNE-EN ISO 13934-1
Tear Strength (Warp / Weft)	4/3 daN ±10%	UNE-EN ISO 13937-2
Colour fastness to artificial light - Xenotest	7-8	UNE-EN ISO 105 B02
Colour fastness to artificial weathering - Xenotest	4-5	UNE-EN ISO 105 B04
Oil Reppellency	≥ 5	UNE-EN ISO 14419
Water Reppellency	≥ 5	UNE-EN ISO 4290

STANDARD AWNINGS

ART MONOBLOC-350

Maximum dimensions

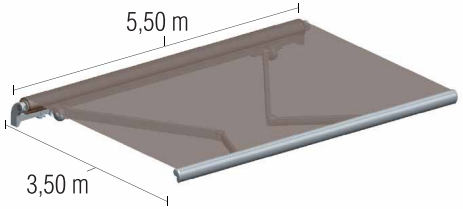

Wall mounting (mm)

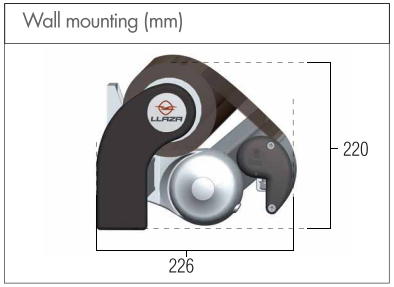

Ceiling mounting (mm)

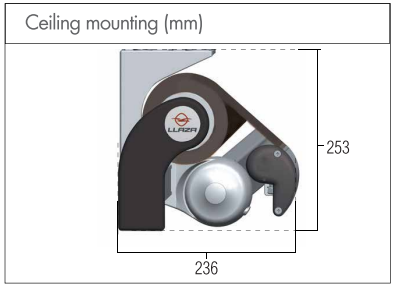

Classification

Wind
≤ 28 km/h

Durability
C.3 - Medium Corrosivity according to ISO 12944

Minimum Slope

Operation

- Manual
- Motorised
- Automated
- Power supply should be provided prior to installation and next to the product

Mounting

- Wall
- Ceiling

Bracket Dimensions (mm)





Arms & Fabric Support

Valance Dimension

Length - Same width as awnings

Height - 400mm Standard but can be customised

Fabric Welded

Minimum width as per projection & arms

Awnings minimum width as per projection & No. arms recommended			
	2- Arms	3- Arms	4- Arms
Projection (m)	Min. Width	Min. Width	Min. Width
2000	2620	3820	5040
2500	3120	4570	-
2750	3370	4950	-
3000	3620	5320	-
3500	4120	-	-

Finishes

Lacquer in accordance with QUALICOAT standards
Stainless steel screws and bolts
Arms with integral laquering

ART MONOBLOC-500

Maximum dimensions

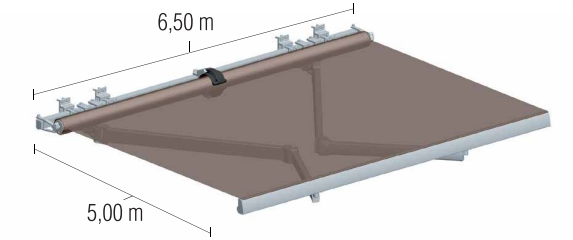

Classification

c.1

Wind
≤ 28 km/h

c.3

Durability
C.3 - Medium Corrosivity according to ISO 12944

Bracket Dimensions (mm)



Arms & Fabric Support

Valance Dimension

Length - Same width as awnings

Height - 400mm Standard but can be customised

Fabric Welded

Wall mounting (mm)

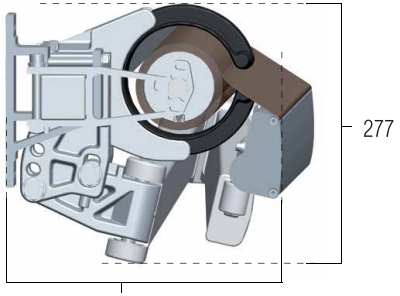

Ceiling mounting (mm)

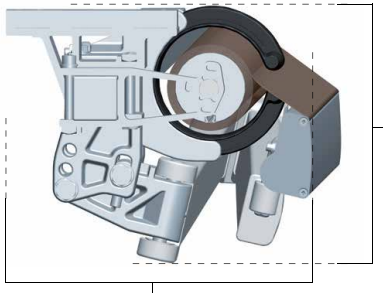

Minimum Slope

Operation

- ☑ Motorised
- ☑ Automated
- ☑ Power supply should be provided prior to installation and next to the product

Mounting

- Wall
- Ceiling

Minimum width as per projection & arms

Awnings minimum width as per projection & No. arms recommended			
	2- Arms	3- Arms	4- Arms
Projection (m)	Min. Width	Min. Width	Min. Width
4,50	5,50	8,15	10,90
5,00	6,00	8,90	11,90

Finishes

Lacquer in accordance with QUALICOAT standards
Stainless steel screws and bolts

Awnings

- Our retractable awning is ideal to expand outdoor living space or to cover terraces adding value to your property. Awnings offers the ideal solution for sun protection, creating a comfortable outdoor environment all year round.

- Qualitative material, welded fabrics and rust free product. The fabrics we use protects you from strong UV rays and you expect it to last long on the sea side.

- Ideal for domestic as well as commercial spaces.

Colour Options

Easy to Clean

Waterproof Fabric

Motorised Option

Coastal Environment

Changeable Fabrics

DECO-B
SHADES

MADE TO SHADE LTD

Lot 4 - Ground Floor - Le Hub - DBM Industrial Zone - Phoenix - Mauritius
T (230 603 2990 | E info@deco-b.mu | W www.deco-b.mu

WWW.DECO-B.MU